

# MARMOPLUS

**HOMOGENEOUS FLOORING**



TECHNICAL DATA	TEST METHOD	MARMO PLUS
TOTAL THICKNESS	EN 428	2.0 MM
WEIGHT	EN 430	2950 G/M2
ROLL WIDTH	EN 426	2 M
ROLL LENGTH	EN 426	20 M.
FIRE RATING	EN ISO 13501-1	CLASS BFL-S1
FLAMMABILITY	ASTM E648	CLASS I
SMOKE DENSITY	ASTM E662-13A	564 & 491
SLIP RESISTANCE (DRY)	ASTM D2047-11	0.37
SLIP RESISTANCE (WET)	ASTM D2047-11	0.39
WEAR RESISTANCE	EN 660-2	T≤2.0 MM3
DIMENSIONAL STABILITY	EN 434	0.16% & 0.14%
RESIDUAL INDENTATION	EN ISO 24343-1	0.07 MM
	ASTM F970	0.034 MM
FLEXIBILITY	EN 435	NO CRACK
TOXICITY FUMES	BS 6853	R<0.3
VOC	ATM D5116	0.02 µG/M3




14, 16 SOI NGAMVONGWAN 2 YAEK 5, BANGKHEN,  
 MUANG NONTABURI, NONTABURI 11000 THAILAND.  
 TEL +66-(0) 2580-0620, (0)2 951-0710-4  
 FAX. +66(-0) 2951-0718, (0) 2580-4557  
 SALES@STARFLEXTILE.COM, EXPORT@STARFLEXTILE.COM  
 WWW.STARFLEXTILE.COM



RD-1825



RD-1827

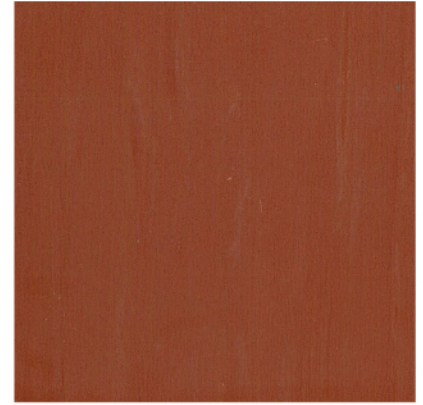

RD-1829



RD-1888



RD-1808



RD-1870



RD-1839



RD-1868



RD-1878



RD-1836



RD-1819



RD-1886

# MARMOPLUS

## HOMOGENEOUS FLOORING

SIZE  
2 M. X 20 M.



THICKNESS  
2.0 MM.



TREATMENT  
PUR



TYPE  
SHEET

- HIGH PERFORMANCE FLEXIBLE HOMOGENEOUS FLOORING AVAILABLE IN SHEET FORMAT.
- GROUP T WEAR RESISTANCE, SUITABLE FOR HEAVY DUTY TRAFFIC.
- DIRECTIONAL DESIGN.
- PUR SURFACE TREATMENT FOR EASE OF MAINTENANCE.
- EXCELLENT ANTI-BACTERIA AND ANTI-FUNGUS TO CREATE CLEAN SPACE.
- 100% RECYCLABLE.



RD-1826



RD-1816



RD-1817



RD-1883



RD-1885



RD-1854



RD-1835



RD-1853