



EL GRAND

HOMOGENEOUS FLOORING




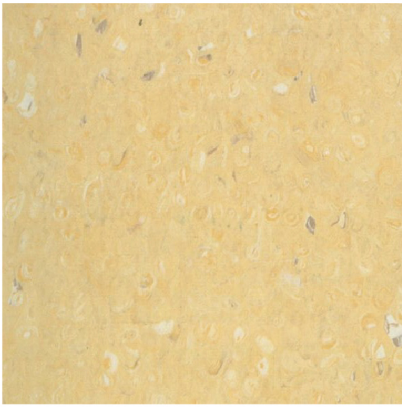


RN-1725

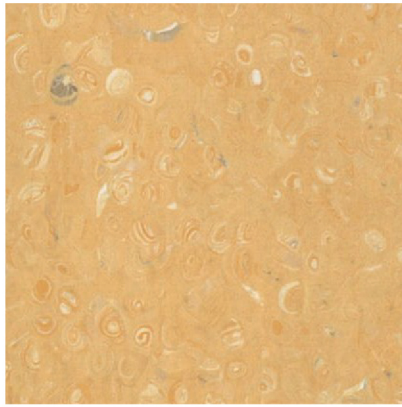


RN-1774

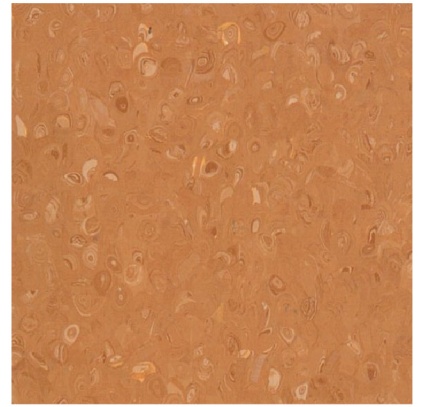


RN-1727

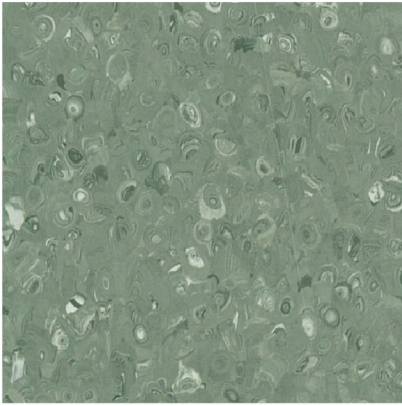


RN-1742

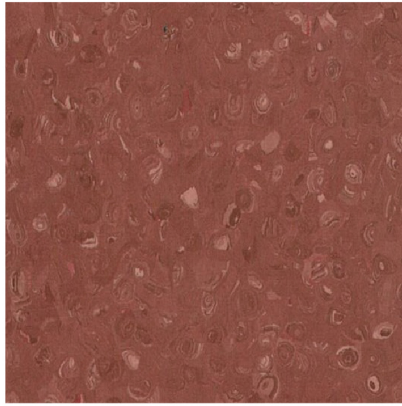


RN-1728

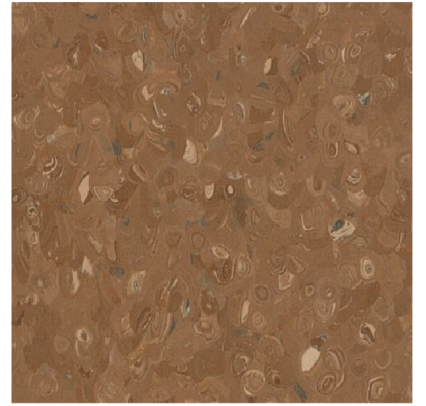


RN-1733

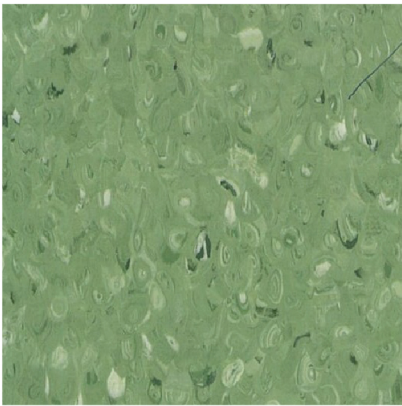


RN-1739

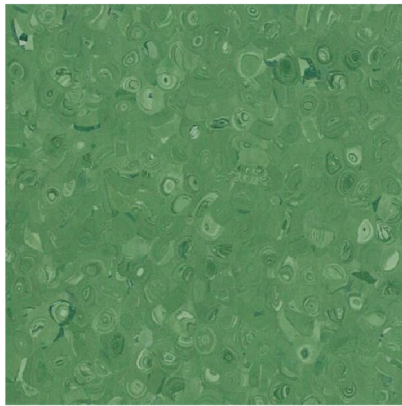


RN-1736

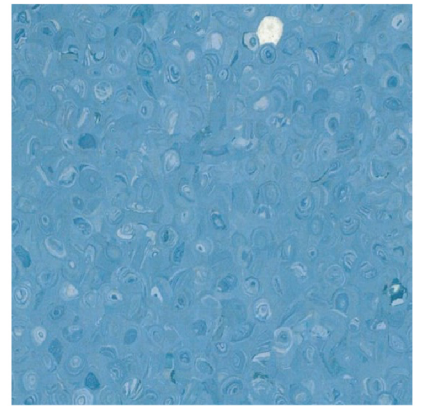


RN-1770

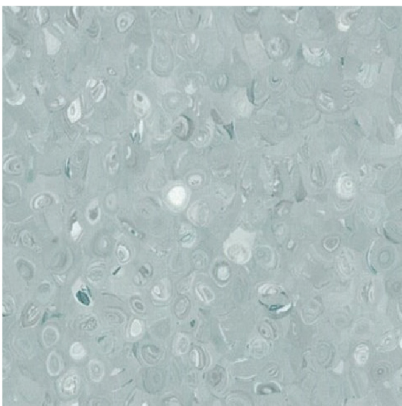

RN-1715

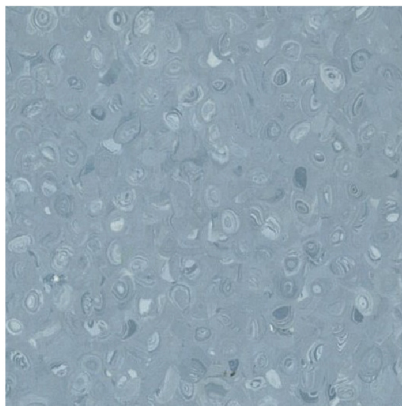

RN-1776

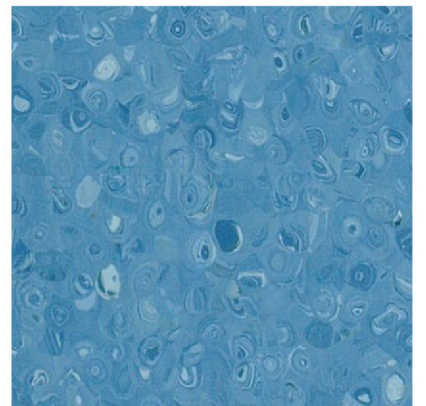

RN-1773

ELGRAND

HOMOGENEOUS FLOORING

SIZE
2 M. X 24 M.



THICKNESS
2.0 MM.




TREATMENT
PUR




TYPE
SHEET


- HIGH PERFORMANCE FLEXIBLE HOMOGENEOUS FLOORING AVAILABLE IN SHEET FORMAT
- GROUP T WEAR RESISTANCE, SUITABLE FOR HEAVY DUTY TRAFFIC.
- NON-DIRECTIONAL DESIGN, HELPS TO REDUCE WASTE DURING INSTALLATION.
- PUR SURFACE TREATMENT FOR EASE OF MAINTENANCE.
- EXCELLENT ANTI-BACTERIA AND ANTI-FUNGUS TO CREATE CLEAN SPACE
- 100% RECYCLABLE.

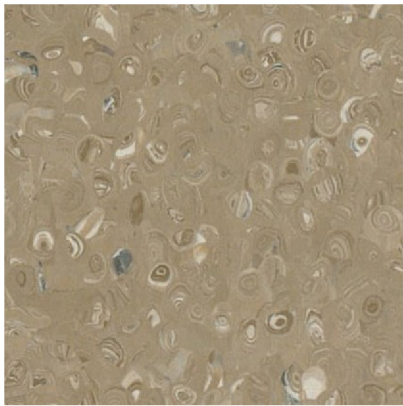


RN-1735

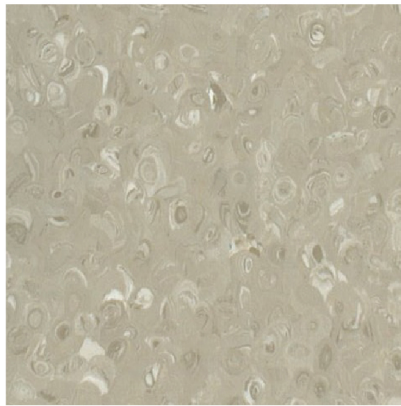


RN-1785

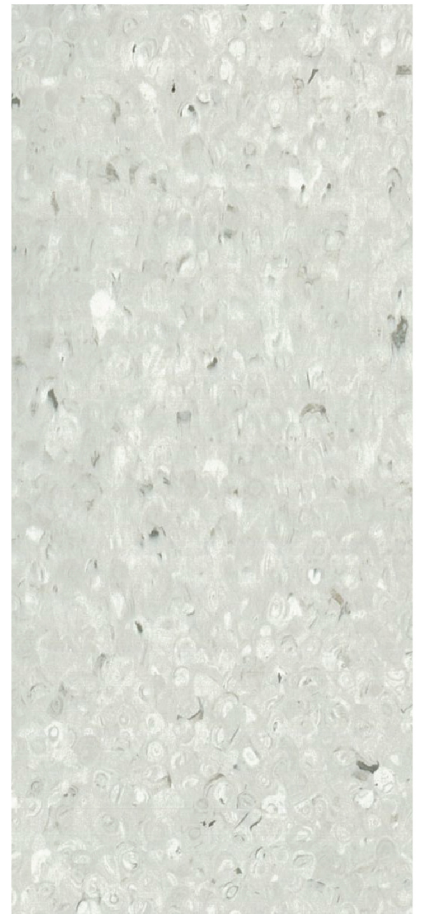

RN-1711

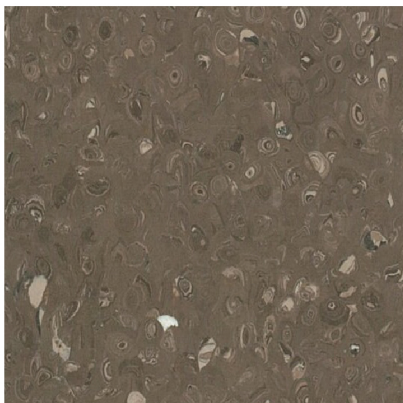


RN-1737

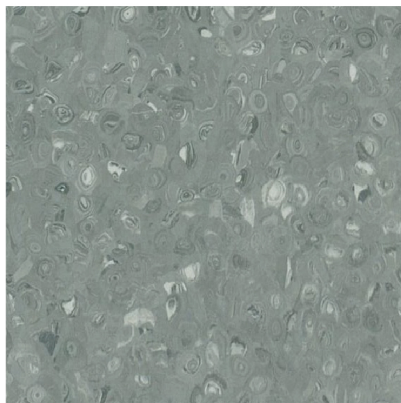


RN-1754



RN-1723

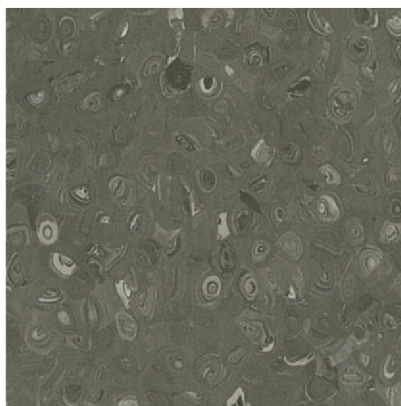

RN-1740

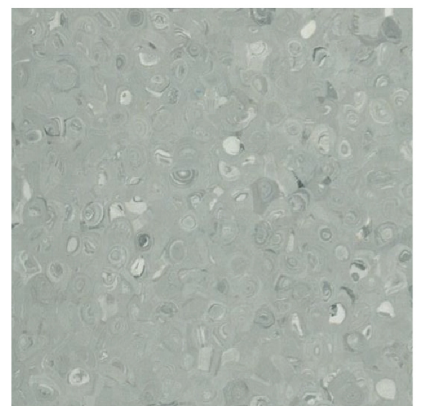

RN-1717

TECHNICAL DATA**TEST METHOD****ELGRAND**

TOTAL THICKNESS	EN ISO 24346	2.0 MM
WEIGHT	EN ISO 23997	2950 G/M2
ROLL WIDTH	EN ISO 24341	2 M
ROLL LENGTH	EN ISO 24341	24 M.
EUROPEAN RATING	EN 685	34-43
FIRE CLASSIFICATION	EN 13501-1	CLASS BFL-S1
	EN ISO 9239-1	≥8 KW/M2
	EN ISO 11925-2	QUALIFIED
ANTI-STATIC PROPERTY	EN 1815	<2 KV
ANTI-SLIP TEST	DIN 51130	R9
	EN 13893	μ ≥0.3
WEAR RESISTANCE	EN 660-2	T≤2.0 MM3
DIMENSIONAL STABILITY	EN ISO 23999	≤0.4%
RESIDUAL INDENTATION	EN ISO 24343-1	≤0.04 MM
CASTOR CHAIR TEST	EN 425	QUALIFIED
FLEXIBILITY	EN ISO 24344	QUALIFIED
COLOR FASTNESS	EN ISO 105-B02	≥6
CHEMICAL RESISTANCE	EN ISO 26987	GOOD
ANTI-BACTERIAL PROPERTY	EN ISO 846-C	NO BACTERIAL
SPECIAL MAINTENANCE TREATMENT		PUR
TVOC AFTER 28 DAYS	ISO 16000	<10 μG/M3



14, 16 SOI NGAMVONGWAN 2 YAEK 5, BANGKHEN,
 MUANG NONTHABURI, NONTHABURI 11000 THAILAND.
 TEL +66-(0) 2580-0620, (0)2 951-0710-4
 FAX. +66-(0) 2951-0718, (0) 2580-4557
 SALES@STARFLEXTILE.COM, EXPORT@STARFLEXTILE.COM
 WWW.STARFLEXTILE.COM