

NEW

STARFLEX[®]

STAR COLLECTION

HOMOGENEOUS FLOORING



WWW.STARFLEXTILE.COM

**GO
green** 

STAR COLLECTION

HOMOGENEOUS FLOORING

NEW




SIZE
600 X 600 MM.



THICKNESS
2.0 MM.



TREATMENT
PUR ACTIVE




TYPE
TILE (SQUARE)



SC-6211




SC-6274

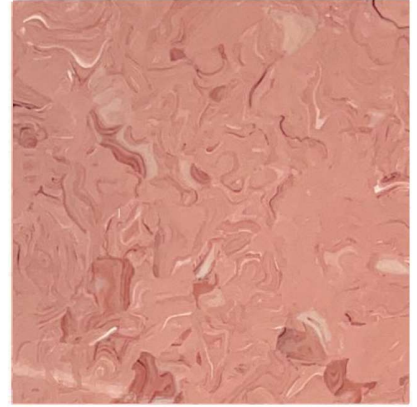

SC-6227



SC-6239

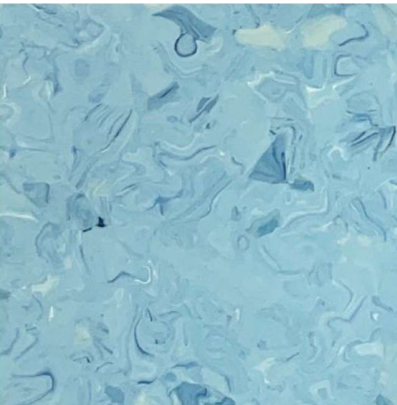

SC-6270




PLACE RECOMMENDED

HOUSING, HEALTHCARE, HOSPITAL, CLINIC, OFFICE ADMINISTRATION, EDUCATION, HOTEL, RESTAURANT, RETAIL

SHADE AND COLOR MAY VARY SLIGHTLY FROM ACTUAL TILES, PLEASE REQUEST ACTUAL SAMPLE FROM MARKETING & SALES DEPARTMENT


- FLEXIBLE HOMOGENEOUS FLOOR COVERING IN TILE FORM WITH A MIX OF COLORED CHIPS THROUGHOUT THE THICKNESS
- DENSELY COMPACTED SURFACE FOR BETTER HYGIENE, MAINTENANCE AND TRAFFIC RESISTANCE
- LARGER SIZE TILE, LESS JOINTS, FASTER INSTALLATION AND MORE AESTHETIC
- PUR ACTIVE WITH MICRO SILICA REINFORCED ENHANCES PERFORMANCE AND DURABILITY
- 100% RECYCLABLE

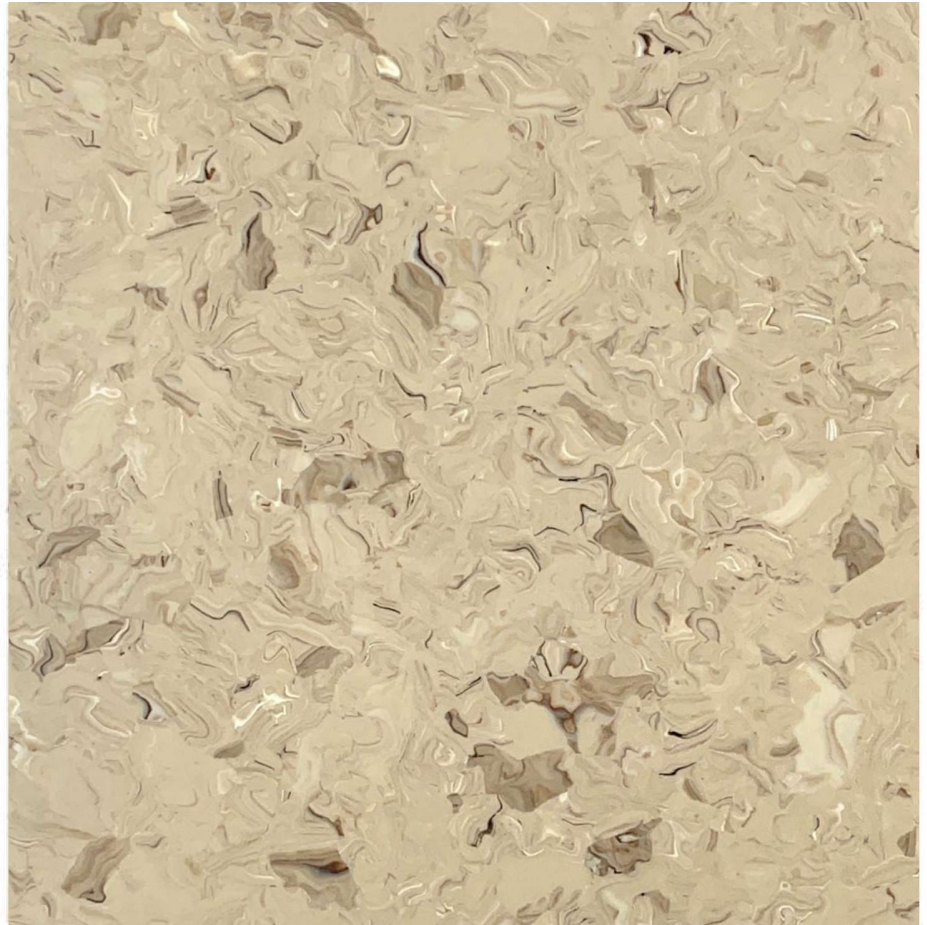

SC-6285



SC-6260

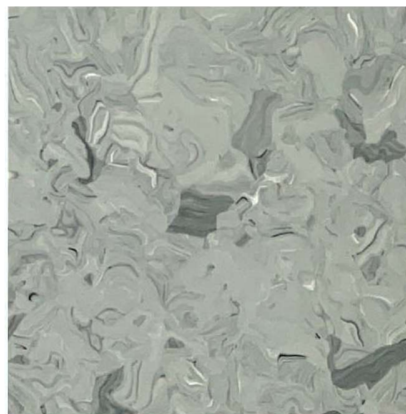

SC-6254



SC-6268

PLACE RECOMMENDED

HOUSING, HEALTHCARE, HOSPITAL, CLINIC, OFFICE ADMINISTRATION, EDUCATION, HOTEL, RESTAURANT, RETAIL

SHADE AND COLOR MAY VARY SLIGHTLY FROM ACTUAL TILES, PLEASE REQUEST ACTUAL SAMPLE FROM MARKETING & SALES DEPARTMENT

**STARFLEX
STAR COLLECTION
HOMOGENEOUS FLOORING
TECHNICAL DATA**

NEW

DESCRIPTION			STAR COLLECTION	
Total thickness	ISO 24346	Nominal value +0.15 mm / -0.10 mm	Pass	2.0 mm +0.04 mm
Weight	ISO 23997	Nominal value +13 % / -10 %	Pass	3,715 g/m ² +0.3 %
Size	ISO 24342	Deviation ≤ 0.13 % of nominal length up to 0.5 mm maximum	Width	600 mm
Side length			Length	600 mm
Squareness and straightness	ISO 24342	> 400 mm : ≤ 0.35 mm > 400 mm : ≤ 0.35 mm	Pass	0.35 mm
			Pass	0.30 mm
CLASSIFICATION				
Product specification	ISO 10581	-	Homogeneous poly (vinyl chloride) floor coverings	
European classification	ISO 10874	-	34 - 43	
PERFORMANCES				
Type Binder content	ISO 10581	-	Type II	
Dimensional stability	ISO 23999	≤ 0.40 %	Pass	0.10 %
Residual indentation	ISO 24343-1	≤ 0.1 mm	Pass	0.01 mm
Flexibility	ISO 24344, Method A	Test using 20 mm mandrel product show no further cracking	Pass	20 mm mandrel no cracking
Effect of castor chair	ISO 4918	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance	Pass	No visible change
Colour fastness	ISO 105-B02	6 minimum	Pass	> 6
Surface treatment	-	-	PUR Active	
Effect of stains	ISO 26987	-	Excellent	



STARFLEX[®]

14, 16 SOI NGAMVONGWAN 2 YAEK 5, BANGKHEN,
MUANG NONTHABURI, NONTHABURI 11000 THAILAND
TEL: +66-(0) 2580-0620, (0) 2951-0710-4
FAX: +66-(0) 2580-4557, (0) 2951-0718
SALES@STARFLEXTILE.COM, EXPORT@STARFLEXTILE.COM
WWW.STARFLEXTILE.COM