

STAR COLLECTION

HOMOGENEOUS FLOORING



STAR COLLECTION

HOMOGENEOUS FLOORING



SIZE
457.2 X 609.6 MM.




THICKNESS
2.0 MM.



TREATMENT
PUR ACTIVE



TYPE
TILE (RECTANGLE)

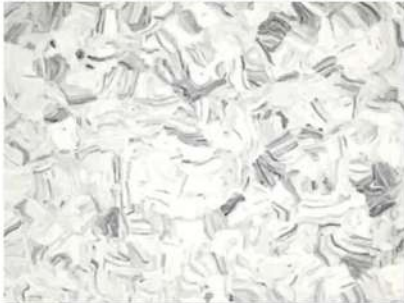

SC-5717



SC-5785



SC-5786



SC-5718



SC-5723



PLACE RECOMMENDED

HOUSING, HEALTHCARE, HOSPITAL, CLINIC, OFFICE ADMINISTRATION, EDUCATION, HOTEL, RESTAURANT, RETAIL

SHADE AND COLOR MAY VARY SLIGHTLY FROM ACTUAL TILES, PLEASE REQUEST ACTUAL SAMPLE FROM MARKETING & SALES DEPARTMENT

- FLEXIBLE HOMOGENEOUS FLOOR COVERING IN TILE FORM WITH A MIX OF COLORED CHIPS THROUGHOUT THE THICKNESS
- DENSELY COMPACTED SURFACE FOR BETTER HYGIENE, MAINTENANCE AND TRAFFIC RESISTANCE
- PUR ACTIVE WITH MICRO SILICA REINFORCED ENHANCES PERFORMANCE AND DURABILITY
- 100% RECYCLABLE



SC-5735



SC-5727



SC-5739



SC-5770



PLACE RECOMMENDED

HOUSING, HEALTHCARE, HOSPITAL, CLINIC, OFFICE ADMINISTRATION, EDUCATION, HOTEL, RESTAURANT, RETAIL

SHADE AND COLOR MAY VARY SLIGHTLY FROM ACTUAL TILES, PLEASE REQUEST ACTUAL SAMPLE FROM MARKETING & SALES DEPARTMENT

**STARFLEX
STAR COLLECTION
HOMOGENEOUS FLOORING
TECHNICAL DATA**

DESCRIPTION			STAR COLLECTION	
Total thickness	ISO 24346	Nominal value +0.15 mm / -0.10 mm	Pass	2.0 mm +0.04 mm
Weight	ISO 23997	Nominal value +13 % / -10 %	Pass	3716 g/m2 -3.12 %
Size	ISO 24342	Deviation ≤ 0.13 % of nominal length up to 0.5 mm maximum	Width	457.2 mm
			Length	609.6 mm
Squareness and straightness	ISO 24342	> 400 mm : ≤ 0.35 mm	Pass	0.35 mm
		> 400 mm : ≤ 0.35 mm	Pass	0.30 mm
CLASSIFICATION				
Product specification	ISO 10581	-	Homogeneous poly (vinyl chloride) floor coverings	
European classification	ISO 10874	-	34 - 43	
PERFORMANCES				
Type Binder content	ISO 10581	-	Type I	
Dimensional stability	ISO 23999	≤ 0.40 %	Pass	0.10 %
Residual indentation	ISO 24343-1	≤ 0.1 mm	Pass	0.01 mm
Flexibility	ISO 24344, Method A	Test using 20 mm mandrel product show no further cracking	Pass	20 mm mandrel no cracking
Effect of castor chair	ISO 4918	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance	Pass	No visible change
Colour fastness	ISO 105-B02	6 minimum	Pass	> 6
Surface treatment	-	-	PUR ACTIVE	
Effect of stains	ISO 26987	-	Excellent	



STARFLEX®



14, 16 SOI NGAMVONGWAN 2 YAEK 5, BANGKHEN,
MUANG NONTABURI, NONTABURI 11000 THAILAND
TEL: +66-(0) 2580-0620, (0) 2951-0710-4
FAX: +66-(0) 2580-4557, (0) 2951-0718
SALES@STARFLEXTILE.COM, EXPORT@STARFLEXTILE.COM
WWW.STARFLEXTILE.COM